


TEST\_CASE

BNO08x::disable\_calibrated\_gyro

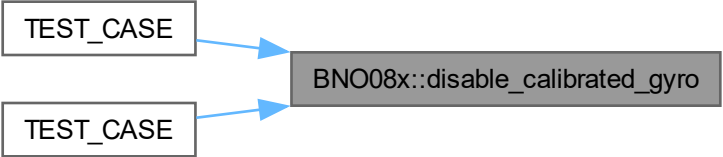

```
graph LR; TC1[TEST_CASE] --> BNO[BNO08x::disable_calibrated_gyro]; TC2[TEST_CASE] --> BNO;
```

The diagram illustrates a test setup where two separate test cases, both labeled 'TEST\_CASE', are used to verify the functionality of the 'BNO08x::disable\_calibrated\_gyro' method. Each test case is represented by a white rectangular box with a black border, and the method being tested is shown in a gray rectangular box with a black border. Blue arrows indicate the flow from each test case to the method box.